


# Duke®

## DY-B6050-XJ

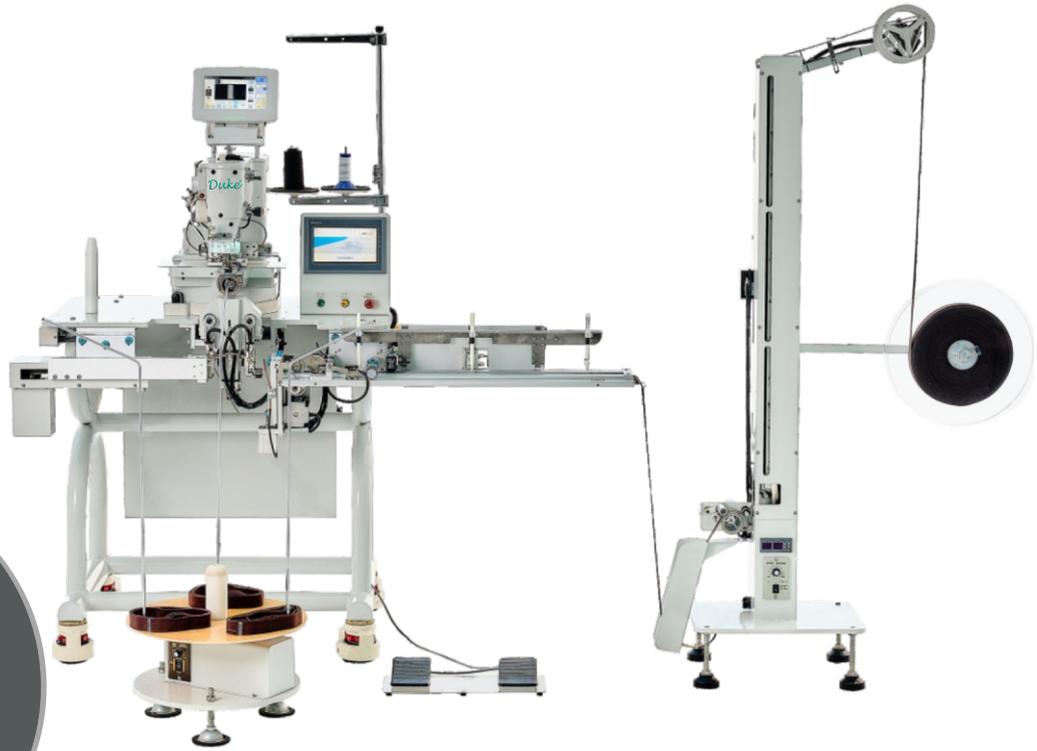

## Elastic Joining Machine |

### Products Features

- Preheat and flatten the elastic band in advance to prevent material creases from sewing normally.
- Automatic stop for lack of material to prevent time waste caused by idle running of the machine.
- Pre-send the elastic tape in advance to prevent the size and site error caused by the elasticity and friction resistance of the elastic belt.
- Production on demand to prevent material waste caused by overproduction.
- Machine will stop automatically when run out of bobbin thread.
- Joints will be detected and cut off automatically.
- LOGO recognizing and positioning.
- Automatic marker for positioning.

### Product Parameter

Working Area : 60x50mm  
Maximum Sewing Speed : 3000r.p.m  
Stitch : 0.05-12mm  
Maximum Stitches : 20000 stitches/pattern  
Outer Pressure Foot : Electrical  
Motor : 750W Direct-drive Servo Motor  
Needle : DPx5 12-14#  
Air Pressure : 0.5Mpa 1.8L/min  
Stored Program : 1~999 patterns  
Power : 2500W  
Operation Type : Dahao touch screen + PLC  
Supply Voltage : 220V  
Size : 2100x740x1600mm  
Capacity : 8-13 pcs/Min  
Net weight : 250KG



## HARI CHAND ANAND & CO.

Corporate Head Office:

A-94/1, Okhla Industrial Area Phase II, New Delhi - 110020

+91-8584068564

enquiry@grouphca.com