

Duke®

DY600D-01CBX356/RP



Automatic Stepper Motor Cylinder Bed Interlock Machine

Specifications:


										
DY600D-33×356/LC/RP/RTF	3	5	UY128GAS 11#	5.6	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-33×364/LC/RP/RTF	3	5	UY128GAS 11#	6.4	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-33×356/CT/LC/RP/RTF	3	5	UY128GAS 11#	5.6	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-33×356/DL/LC/RP/RTF	3	5	UY128GAS 11#	5.6	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-33×364/CT/LC/RP/RTF	3	5	UY128GAS 11#	6.4	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-33×364/DL/LC/RP/RTF	3	5	UY128GAS 11#	6.4	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-35×356/LC	3	5	UY128GAS 11#	5.6	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-35×364/LC	3	5	UY128GAS 11#	6.4	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-35×356/CT/LC/UT	3	5	UY128GAS 11#	5.6	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-35×356/DL/LC/UT	3	5	UY128GAS 11#	5.6	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-35×364/CT/LC/UT	3	5	UY128GAS 11#	6.4	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-35×364/DL/LC/UT	3	5	UY128GAS 11#	6.4	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-35×356/CT/LC/UT	3	5	UY128GAS 11#	5.6	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-35×356/DL/LC/UT	3	5	UY128GAS 11#	5.6	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-01CBX356/RP	3	5	UY128GAS 11#	5.6	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-35×364/CT/LC/UT	3	5	UY128GAS 11#	6.4	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63
DY600D-35×364/DL/LC/UT	3	5	UY128GAS 11#	6.4	4.5	0.6-1.3	5.5-7	5000	57.6/50	66*39.5*63

Duke®


DY600D-01CBX356/RP



Double differential feed design
Independent adjustment of front and rear teeth

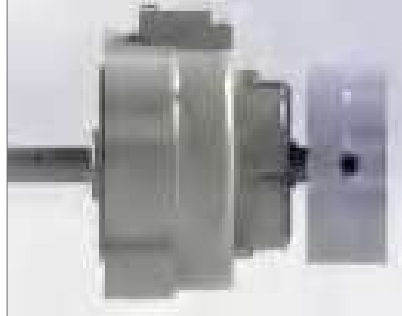

Straight shaft motor

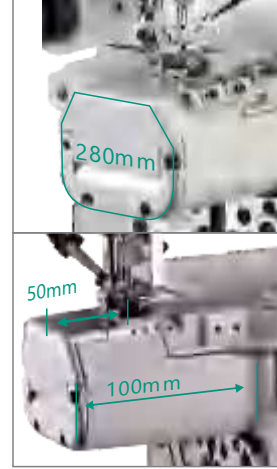

Thread trimmer and foot
lifting by stepper motor



Hemming



type tape binding



type overlock-seam covering



Rear puller



HARI CHAND ANAND & CO.

Corporate Head Office:

A-94/1, Okhla Industrial Area Phase II, New Delhi - 110020

+91-8860086712 , 8584068564

enquiry@grouphca.com