


DY 2261 SERIES


DUKE

3-NEEDLE FEED-OFF-THE-ARM DOUBLE CHAIN-STITCH MACHINE

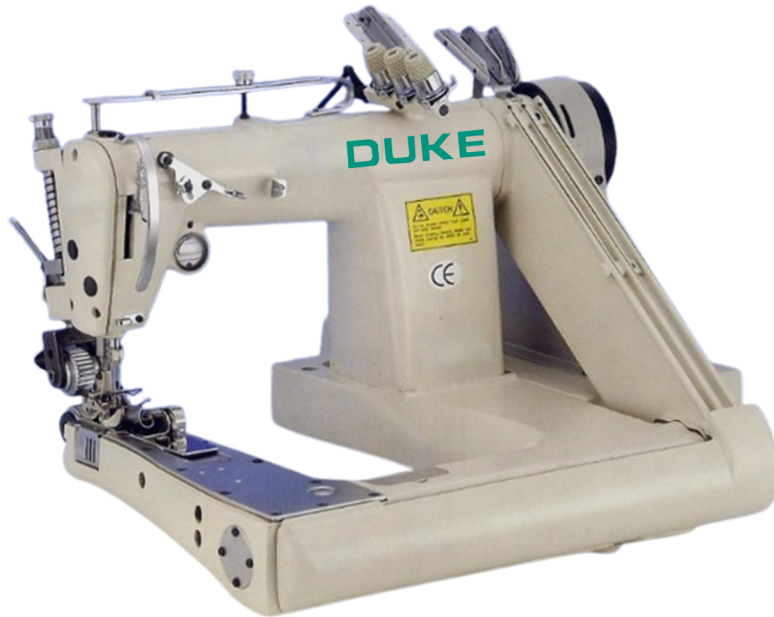

Features:

- Adjustable powerful puller device enables the machine to consistently stitch special in extra-heavy material.
- Available with adjustable moveable needle guard for preventing puckering as well as forming beautifully finished seams.
- Stitch length adjustment by button.
- Stitch length: 5.5 mm

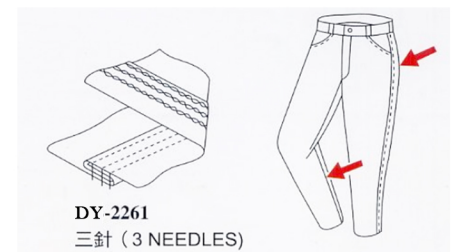

CORRECT OPERATION : 2261 series

Needle (使用針)	Thread (使用線)		Motor	Frequency	Sewing speed	Motor pulley	Belt size
	Upper thread	Lower thread					
# 16	Cotton # 50	Cotton # 60	1/3HP 2-pole	50HZ	3100	85	M-43
# 19	Cotton # 30	Cotton # 50			3600	95	M-44
# 22	Cotton # 20	Cotton # 30	1/2HP 2-pole	60HZ	3100	70	M-41
					3600	80	M-42



SPECIFICATIONS:

Model	DY 2261	DY 2261-XHP	DY 2261-EHP
Material (縫布種類)	Standard	Medium-heavy (7)	Extra-heavy (4)
Sewing Speed	3600 SPM	3000 SPM	3000 SPM
Stitch Length	1.4 mm - 4 mm	1.4 mm - 4 mm	5.5 mm
No. of Needles	3	3	3
Needle Gauge	1/8 1/8 (6.4 mm)	1/8 1/8 (6.4 mm) 5/32 5/32 (8.0 mm)	1/8 1/8 (6.4 mm), 5/32 5/32 (8.0 mm)
Needle Bar Stroke	33.4 mm	36 mm	36 mm
Minimum Tube Size	190 mm	190 mm	190 mm
Puller Device	None	Small-teeth puller	Large-teeth puller

HARI CHAND ANAND & CO

Corporate Head office: A-94/1, Okhla Industrial Area Phase II, New Delhi - 110020

+91 8584068564 | enquiry@grouphca.com

